

TYPICAL APPLICATIONS

- Home appliances, air conditioner, heater, etc.
- Office machines, PC, facsimile, etc.
- Vending machine
- Automotive Power-window, car antenna, door-lock, etc.

ORDERING INFORMATION


			SRD	S	1	12	D	M	
Type	Protective construction	Number of pole	Coil voltage(DC)		Coil sensitivity		Contact form		
SRD	Nil:Flux free type S: Sealed type	1:1 pole	3,5,6,9,12, 24,48 V		D:0.36W		Nil:1 form C M:1 form A B:1 form B		

COIL SPECIFICATION (at 20°C)


Nominal Voltage (VDC)	Pick-up Voltage VDC(max)	Drop-out Voltage VDC(min)	Coil Resistance (Ω) ±10%	Nominal operating Power(W)	Max allowable Voltage
3	2.25	0.15	25	0.36	130% of nominal Voltage
5	3.75	0.25	69		
6	4.50	0.30	100		
9	6.75	0.45	225		
12	9.00	0.60	400		
18	13.50	0.90	900		
24	18.00	1.20	1'600		
48	36.00	2.40	6'400		

DIMENSIONS


Unit:mm

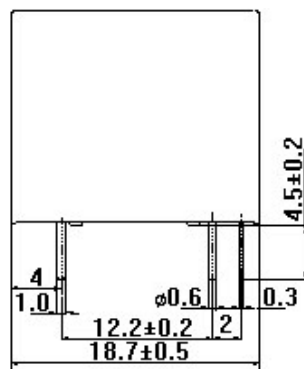


(BOTTOM VIEW)

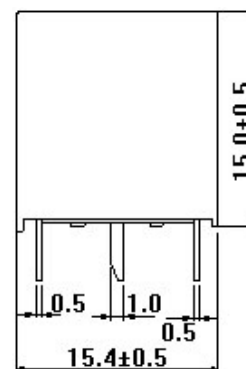


(BOTTOM VIEW)





SRD-S-1XXD



(BOTTOM VIEW)



SRD-S-1XXDM

(BOTTOM VIEW)


(BOTTOM VIEW)






SRD-S-1XXDB

(BOTTOM VIEW)

(BOTTOM VIEW)



REFERENCIAL DATA

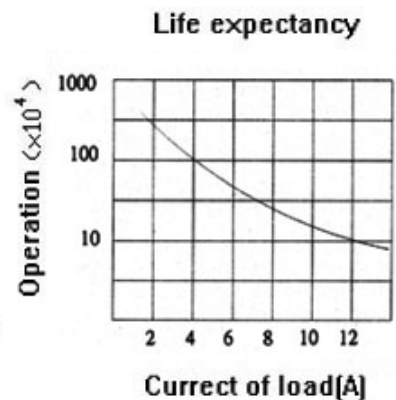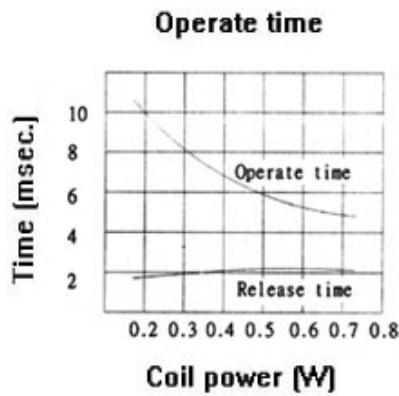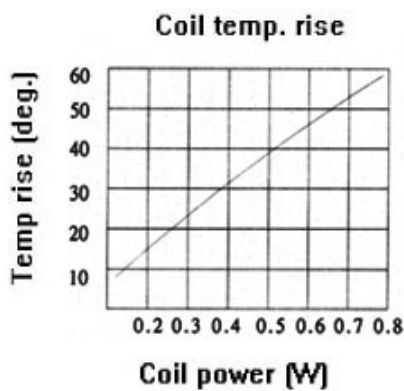

© ООО НВФ Авторские Технологии, 2000-2008
 620134, Екатеринбург, ул. Монтажников, 4, phone/fax: +7(343)-373-4769, +7(343)-373-4703
 Обновлено: Sunday, 16-Apr-2006 15:51:37 YEKST

[Домой](#) | [Продукция](#) | [Производство](#) | [Компоненты](#) | [Контакты](#) | [О нас](#) | [Карта Сайта](#)

ATech | Copyright | Privacy