
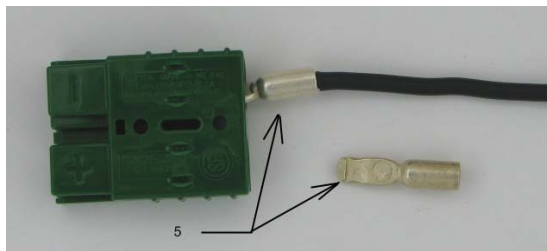



CADX Services, Inc.
 1290 York Street
 Lima NY 14485

Description:	Cable assembly, Single Motor, Battery	
DWG No:	8019-27-01	Rev A

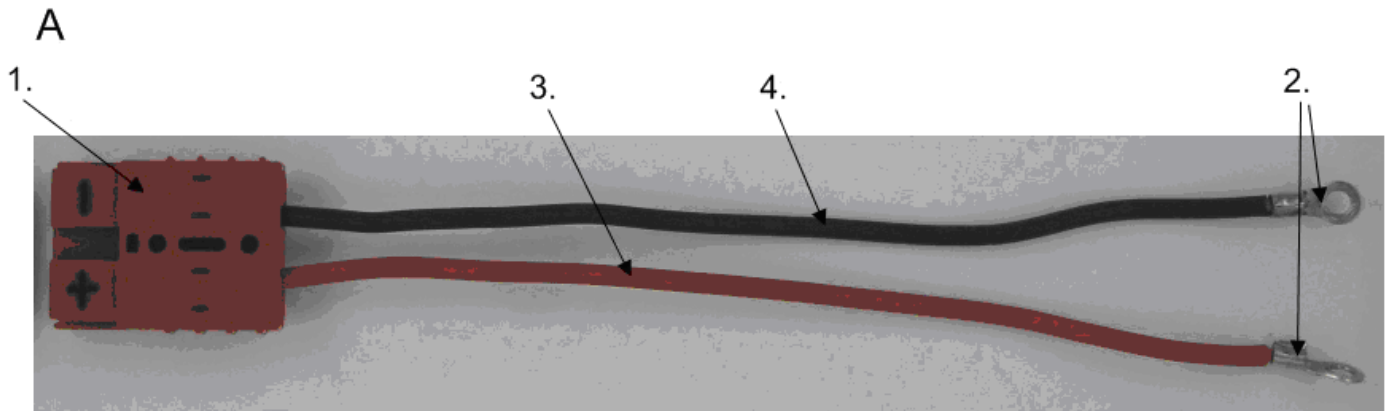

Item	Qty	Description	Length	Manufacturer	Part Number	CADX Number	Notes
1	2	Connector, 50A, Red	-	Anderson	6331G2	5040	ROHS COMPLIANT
2	2	Ring Terminal, non-insulated, 10 AWG, #8 (0.164") stud, 0.39" ring width	-	McMaster-Carr	7113K37	5067	ROHS COMPLIANT
3	1	RED WIRE 10AWG -20°C ~ 105°C, UL 1015	14.5 Feet	Copperfield	10019-10-RED	7507	ROHS COMPLIANT
4	1	BLACK WIRE 10AWG -20°C ~ 105°C, UL 1015	15 Feet	Copperfield	10019-10-BLK	7508	ROHS COMPLIANT
5	1	Fuse, 75A, Auto	-	-	-	-	NOT SUPPLIED
7	2	ANDERSON PWR TERMINAL	-	Anderson			PACKAGED WITH 6331G2 ROHS COMPLIANT

Notes:

- Items 3-4 are stranded hook-up wire, and should be rated for use in automotive applications.
- Wires should be stripped 0.25" at ring terminal end and 0.375" at Anderson pin end, +/- 0.050".
- Exposed wire ends should be tinned after stripping.